

How to configure VOD and Live Streaming using a BitGravity account on the Kaltura SaaS Platform?

Expand/Collapse All

Ensure that the following features/options are configured in the account on the Kaltura Admin Console:

1. Configure the account to support Live Streaming.
2. Configure the account as a sub account of TCL main account, so that TCL can control the new account via the Management Console.

Partner's Parameters for VOD Streaming


You will need to supply us with the Partner's Parameters for VOD Streaming from your BitGravity account.

Information	Value
Partner Name	TCL- <code>{company id}</code> See Network Settings Parameters .
Enable Remote Storage	Yes/No
Enable Origin Pull	Yes/No
VOD Origin Pull Hostname	<code>{company id}.pc.cdn.bitgravity.com</code>
VOD Remote Storage Hostname	<code>{company id}.bc.cdn.bitgravity.com</code>

Multiscreen-WSA Origin Pull Hostname	{company id}.pc-s.cdn.bitgravity.com
Multiscreen-WSA Remote Storage Hostname	{company id}.bc-s.cdn.bitgravity.com
Enable SecureAccess	Yes/No
URL Secret (If SecureAccess enabled)	
Token expiring	Default - 300

Network Settings Parameters

The Company Id should be taken from “Network Settings” > “Network Overview” tab.

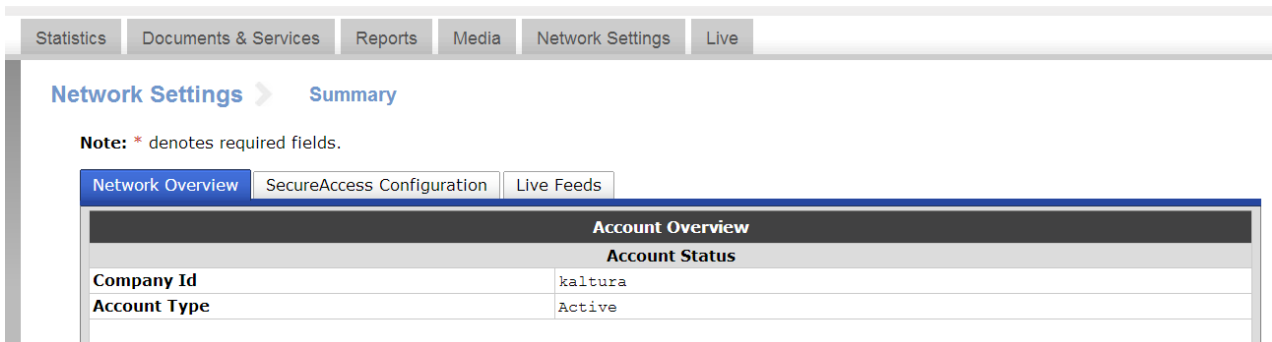

The screenshot shows a web interface with a navigation bar containing tabs: Statistics, Documents & Services, Reports, Media, Network Settings, and Live. The 'Network Settings' tab is active, and the 'Summary' sub-tab is selected. Below the navigation, there is a note: "Note: * denotes required fields." There are three sub-tabs: 'Network Overview' (selected), 'SecureAccess Configuration', and 'Live Feeds'. The 'Network Overview' sub-tab displays an 'Account Overview' table with the following data:

Account Overview	
Account Status	
Company Id	kaltura
Account Type	Active

To configure the Origin Pull ONLY

The following setting should be used in BitGravity configuration:

- The Origin pull should be set to: {company id}.tcl.origin.kaltura.com

Partner’s Parameters for Remote Storage

☰ To configure the Partner’s Parameters for Remote Storage

Please supply the following parameters from your BitGravity remote storage account.

Information	Value
BitGravity FTP username	
BitGravity FTP password	
BitGravity FTP Host name	

SecureAccess Configuration

Secured access should be configured on the '/s' URL in BitGravity’s dashboard.

Network Overview
SecureAccess Configuration
Live Feeds

SecureAccess Settings

The left column is the list of Secure Folders or Paths that the server will match when evaluating which content to secure. This list can be a literal file or directory name, or a Regular Expression matching a specific condition.
The right column is the shared secret to use when generating the Secure Access MD5 hash.

For more information about securing access to your files, read the "Secure Access API" document.

Secure Folders/Regex	Shared Secret(s)
/kaltura/s	rpR37qN8RnV89dU