

SAML module

Last Modified on 11/14/2025 11:26 am IST



This article is designated for administrators.

About

This module enables admins to set up SSO authentication for their video portal using the SAML 2.0 standard.



This module is for the Video Portal only and does not support instances created by Kaltura Events.


Configure

1. Go to your Configuration Management console and click on the Saml module. You can also navigate to it directly using a link: https://{your_videoportal_URL}/admin/config/tab/saml.

Recyclebin
Related
Replacemedia
Robots
Sami
Samlgroupsync
Scheduling

The Saml page displays.



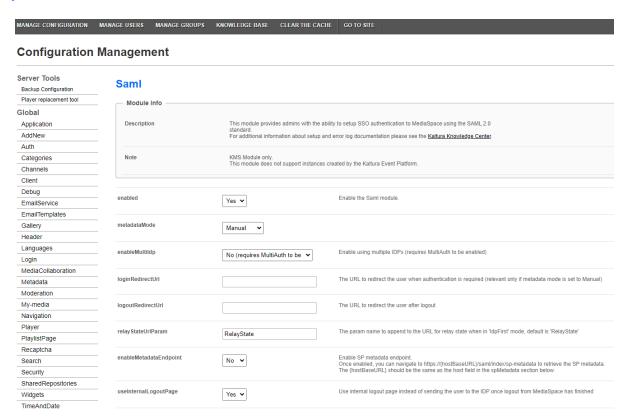

2. Configure the following:

enabled - Set to 'Yes' to enable the module.

metadataMode - Select **Manual** or **Automatic**. Choose **Manual** in most cases for greater reliability and control.



While Automatic mode retrieves and periodically refreshes IdP metadata from a URL, it is generally less stable. Manual mode allows you to directly configure and update the IdP metadata section, ensuring a more consistent experience. Automatic mode should only be used if your setup explicitly requires it.

enableMultildp - Enable using multiple IDPs (requires MultiAuth to be enabled)

loginRedirectUrl - Enter the URL to redirect the user when authentication is required (relevant only if metadata mode is set to Manual). For SP initiated it would be a URL where the request is posted. For IdP initiated a URL with the entity ID as a parameter.

SP Initiated Example: https://idp.example.com/identity

IdP Initiated Example: https://idp.example.com/identity/UnsolicitedSSO? entityID=mediaspaceentityID

logoutRedirectUrl - Enter the URL to redirect the user after logout.





This field is only applicable if useInternalLogoutPage is set to "No" and metadataMode is set to "Manual". When the video portal session expires, the user is redirected to this URL, along with a SAML logout request. This request is made via POST request.

The video portal does not expire login session from the identity provider. For the logout request, video portal uses the value that was provided in the NameID element in the SAML login request.

relayStateUrlParam - Enter the parameter name used by the IdP to specify the redirect URL for relay state when in 'IdpFirst' mode. This defines the default redirect location if it's not included in the request. For example, in PingFederate, this would be TARGET, while for most other SAML providers, it defaults to RelayState.

enableMetadataEndpoint - Enable the SP metadata endpoint to retrieve SP
metadata. Once enabled, you can access the SP metadata at
https://{hostBaseURL}/saml/index/sp-metadata. Make sure to replace {hostBaseURL}
with the value specified in the host field of the spMetadata section below.

useInternalLogoutPage - If set to 'Yes', logging out will terminate the <u>video portal</u> session, and use the internal logout page instead of redirecting to the IdP logout page, accompanied by a message such as the following: *You have signed out of MediaSpace.* For improved security, we recommend closing all browser windows at the end of your online sessions.

allowKeepAlive - When set to 'Yes', session will be extended upon user's interaction. Default is 'No'.

logoutText - If useInternalLogoutPage is set to 'Yes', you can define a custom message to users. You can use HTML tags to display a message.

shouldNestRelayState - Choose whether to append the relay state as a regular query string or as a URL-encoded query string.

shouldPost - When set to 'Yes', the SAML request will be posted instead of using get. Default is 'No'.

shouldSignLogoutRequest - When set to 'Yes', the SP SAML logout request will be signed. Default is 'No'.

shouldDecodeRelayState - When set to 'Yes', RelayState will be decoded before redirect.



spMetadata

Configure the settings of this Service Provider (SP) as defined in the Identity Provider (IdP).

name - Enter the entity ID of the service provider (video portal) as it was configured in your Identity Provider. For example: https://partner_id.mediaspace.kaltura.com (this will be used as the SP entity ID).

host - Enter the desired video portal alias URN (no https:// needed). Please note that only one video portal alias can be used with the SAML module. This is the host of your video portal instance (for example, partner id.mediaspace.kaltura.com).



The host can only be configured with a single URL per video portal instance. If you are using a custom alias for your video portal (for example, video.company.com), use that alias instead.

relayState - Enter the value for the relative URL to redirect the user after login if a relay state is not passed as part of the authentication request. The default is /.

nameIdFormat - This field is only applicable for SP-initiated mode and will not function if the NameID is not released. Select from the following options:

- **Transient**: Recommended for Shibboleth setup.
- **Persistent**: Preferred setup.
- None: Removes the NameIDPolicy element from the SAML request.

certificate - (Optional) Enter the certificate information for encryption of the SAML response. Paste the content of the .crt file without the comment lines (for example, do not paste in: -----BEGIN CERTIFICATE------and ------END CERTIFICATE------). Make sure all text is in a single line with no spaces or line breaks. See Generating a Certificate Workflow.

The certificate value is used to encrypt the response provided by the IdP. The following example shows how the crt file would look including the comment lines and the extra line breaks that should be removed:

MIICsDCCAhmgAwIBAgIJALM+uZK9gWbQMA0GCSqGSIb3DQEBBQUAMEUXCzAJBgNV
BAYTAkFVMRMwEQYDVQQIEwpTb211LVN0YXR1MSEwHwYDVQQKExhJbnRlcm5ldCBX
aWRnaXRzIFB0eSBMdGQwHhcNMTMwNDI0MDgzOTU1WhcNMjMwNDI0MDgzOTU1WjBF
MQswCQYDVQQGEwJBVTETMBEGA1UECBMKU29tZS1TdGF0ZTEhMB8GA1UEChMYSW50
ZXJuZXQgV21kZ210cyBQdHkgTHRkMIGfMA0GCSqGSIb3DQEBAQUAA4GNADCBiQKB
gQC3Pkd3p+a9Yy0TFHuwy6trDlxhKwa0FAwrGlBnJCw4V+XgL5JaymRqICo1Vrk3
MEXFD1hf5GuG17Sm1CXA02XAdzJMemr8RcLjq5dqAPP+6ZZ+3JM9owjvy1LRhMMP
wCUBDeCI3WNvmNDCpnoJp+mBIgyZpr87ecgaCt2626CRKQIDAQAB04GnMIGkMB0G



privateKey - (optional) SP Private Key PEM format. The privateKey value is used to decrypt the response provided by the IdP.

 Do not include MIICXQIBAAKBgQC3Pkd3p+a9Yy0TFHuwy6trDlxhKwa0FAwrGlBnJCw4V+XgL5Ja ymRqICo1Vrk3MEXFD1hf5GuG17Sm1CXA02XAdzJMemr8RcLjq5dqAPP+6ZZ+3JM9 owjvy1LRhMMPwCUBDeCI3WNvmNDCpnoJp+mBIgyZpr87ecgaCt2626CRKQIDAQAB AoGAURW1+jTJ3bQtFexSb4EwcUcBid3IMZdNayVRvtI63xPGHNXwJUy581wZUVD2 1Hz/4ptPt98T1a9NuSTXL+RbeXa0FI5nPXOvIV62Is0Vrg1l1SkKedkWKM3EPesx i A Cqt C3 x OaV+kj DS1R7 x 5 MNX roMHM/t OKg9 x fjmlmcki sy ECQQDwRh ONSTNGKHEAgNA6TqO3X4G9VkYWE1/KT9MQyc2k41LrKLXD9nd39kgHb7lkozq5r+KmVNo2nki3 mqijZ0aTAkEAwzyYQik8pRkFlBH/UDYLJ96wuGrqYjvQO+94WWzWCZPXBPBlOY5g KG+l5WMfIpvHwsbd0iPaZeCax0INW6LC0wJATRNAuIVVxFiuvymTIlEdpXImrTTi sKwwWza2DzmdFRqv+6qIfD8w3bOMMY5+WzEdYnlwbEil4wVtcDBVim1PrwJBALu/ VrAxFaeys0Gc0Qi6n+m8ZfdCoZjL6kjo1bQxTHczW4/dWYqK1v+rtj4sHvHaGrS9 Ju2BGvHjlxRM+amIkI8CQQCHQNwIyVzMvJxnlHGO0Sz04vKPs4xSVegYmOL3JPOt Rr7FMzBMRp46CSa6p38k4ZnAqP7LvoWWci/AvKvjz/xE END RSA PRIVATE KEY-− ← Do not include

idpMetadata

Configure the settings for the Identity Provider (IdP) as follows:

host - IdP Host Name. Enter the Identity Provider's entity ID (for example, https://openidp.feide.no).

issuer - IdP Issuer: The entity ID of the Identity Provider as it appears in the SAML response (for example, https://openidp.feide.no).

name - Enter a user-friendly display name for the IdP (in English).

certFilePath - Enter the full path on the video portal server where the SAML certificate is stored, including the file name. Make sure the certificate file does not contain comment lines like -----BEGIN CERTIFICATE----- or -----END CERTIFICATE-----

certFileContent - Use this field as an alternative to certFilePath. Paste the content of the .crt file without the comment lines (for example, do not paste in: -----BEGIN CERTIFICATE-----). Ensure all text is in a single line, and leave certFilePath empty if using this field.

attributes



userIdAttribute - (Optional) The SAML attribute containing the user id. When blank, NameID element will be used. Example: urn:oid:1.3.6.1.4.1.5923.1.1.1.6

firstNameAttribute - (Optional) The SAML attribute containing the first name. Example: urn:oid:2.5.4.42

lastNameAttribute - (Optional) The SAML attribute containing the last name. Example: urn:oid:2.5.4.4

emailAttribute - (Optional) The SAML attribute containing the email. Example: urn:oid:0.9.2342.19200300.100.1.3

logoutUrlAttribute - (Optional) The SAML attribute containing the logout URL. Example: urn:oid:0.9.2342.19200300.100.1.3 When configured, if useInternalLogoutPage is set to No, the value passed in the attribute will be used instead of the value set in logoutRedirectUrl.

defaultRole

In the defaultRole section, select the default role that should be assigned to each user that is authenticated.



You can configure the option to retrieve the role of the user from the Identity Provider through the Auth module **refreshRoleOnLogin** setting every time a user logs in. This option allows you also, to define a default role for all users and then manually override the role through the MediaSpace user management section.

allowDefaultRole - Set to 'Yes' or 'No'.

role - Select the default role that should be assigned to each user that is authenticated. Choose from the following options:

- viewerRole
- privateonlyRole
- adminRole
- unmoderatedAdminRole

roleAttributes



Click +Add "roleAttributes to map attribute values to video portal roles. An additional section displays: roleAttributes Map attribute values to KMS roles DELETE attribute SAML attribute Name value SAML attribute value role Mapped KMS role ~ anonymousRole + Add "roleAttributes" Configure the following: attribute - Enter the SAML attribute name. value - Enter the SAML attribute value. **role** - Choose the mapped video portal role from the following options: anonymousRole viewerRole privateonlyRole adminRole • unmoderatedAdminRole




emptyRolepartnerRole

If more than one attribute value is found (a user belongs to multiple groups) the user will be mapped to the role that was defined in the last roleAttribute found.

In the following example the SAML response will be parsed to find an attribute named group. If the attribute is found in the assertion and its value is student, the user will get the privateOnlyRole.



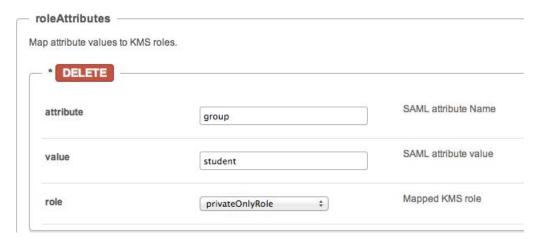

roleAttributesCsv

Complete the following values:

roleAttributesCsv - Map attribute values to video portal roles. Each CSV row should include three values: attributeName, attributeValue, and videoportalRole. Invalid video portal roles would not be saved.

Click **Load a new CSV** to upload a CSV with role attributes.

storageDataEntryId - Enter the data entry ID that stores the parsed csv data


blockAuthorizationAttributes



In the blockAuthorizationAttributes (optional), you can map individual groups and values that are returned in the SAML response and should lead to unauthorizing an authenticated user from using the video portal.

Click +Add "blockAuthorizationAttributes".

A new section displays:

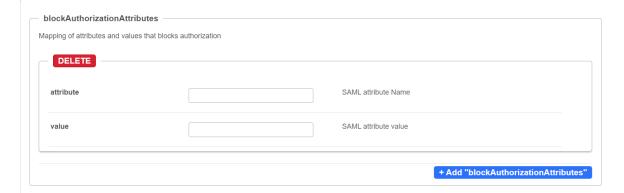

Complete the following:

attribute - Enter the SAML attribute name.

value - Enter the SAML attribute name.

unauthorizedBehavior



The unauthorizedBehavior (optional) is applicable only if the blockAuthorizationAttributes is used. If the field usersuseInternalUnauthorizedPage is in use (set to 'Yes'), you can optionally set the text to be presented to the unauthorized user. If

usersuseInternalUnauthorizedPage is not used, you can specify the URL where the user will be redirected to.

Complete the following values:

usersuseInternalUnauthorizedPage - Default is 'Yes'. If set to 'No', unauthorizedRedirectUrl will be used.

unauthorizedRedirectUrl - (Optional) The URL to redirect the authenticated, but unauthorized users. Should be used only in cases where the customer wants authenticated users to be redirected to his self hosted page.

unauthorizedText - (Optional) Enter the text to be shown in the internal unauthorized page. Leave empty to use the default text.

nameIdStructureAsArray - Specify whether to construct the Name ID attribute as an array when building a SAML Logout Request (leave empty to use as a string).

3. Click Save.

Troubleshooting

If users cannot log in after configuring SAML, see our dedicated SAML troubleshooting guide for common symptoms, error codes, and how to diagnose issues using tools like SAML Tracer or browser network logs.